

sandmaster

sandmaster




Injector Blasting Series

60IN


The dry injector blasting installation 60 IN offers a generous work space with extremely compact dimensions. Based on its proven «sandmaster» blasting system, the installation can be used flexibly



Front opening door

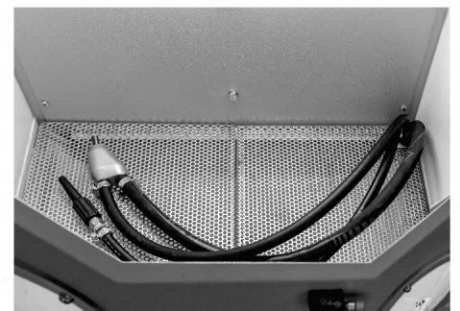

Spacious working area

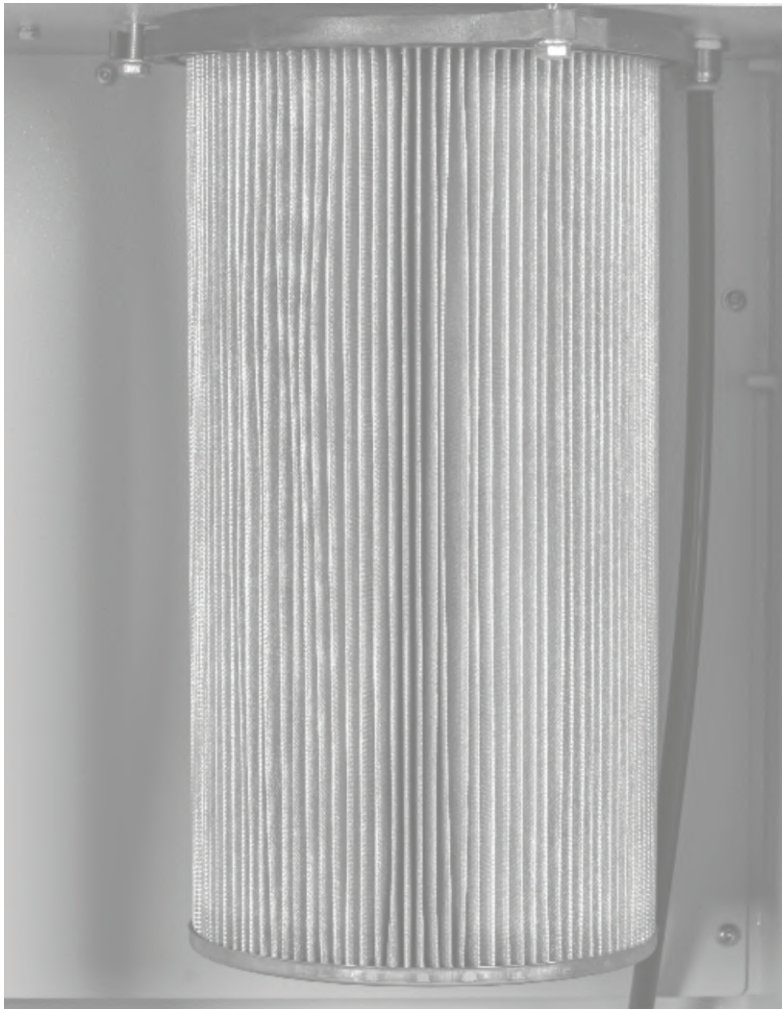

FEATURES

- Injector (suction/vacuum) blasting technology
- Integrated filter system with 1 filter cartridge, total 0.5 Class M filter area 2.4 m²
- Media screening by maintenance-free sifter plate
- Filter cleaning through jet-pulse counter-current system
- Installation according to actual EC machinery directive

DIMENSION CABIN

- Working cabin : 600 x 410 x 330 mm (W x D x H)
- Total machine dimension : 695 x 790 x 945 mm (W x D x H)
- Door system : 1 front-opening door

SPECIFICATION

- Nozzle : Hard metal range diameter are Ø 4-9 mm
- Actuator blasting system : Foot pedal actuator
- Filter cartridge : 1 filter cartridge
- Media abrasives : Aluminium oxide, glass beads, nylon, plastic, etc

SUPPLY

- Air hose : Air supply inlet nipple 3/8" (10mm)
- Pressure : Pressure range 0,5-8 bar
- Supply voltage : 230V 50/60 Hz
- Power consumption : 230W
- Compressed air consumption : Approx. 300 lt/min with nozzle Ø 5 mm and blasting pressure 3 bar

PURPOSE

- Surface cleaning
- Removing fine layer
- Deburring fine parting line
- Remove coating

APPLICATION

- PVD coating/cutting tools
- Medical technology/dental labors
- Machine building
- Mold & dies
- Heat treatment
- Maintenance

OPTION FEATURES

- Security key switch
- Automatic filter cleaning by timer
- Automatic turning basket installation
- Mobile work base instead of table
- Work gloves